



# PIX


Power Transmission Solutions

*Driving growth!*

## PIX-X'tremePro™-XTC

Carbon-corded, High-performance Timing Belt


**YOUR DRIVE TOWARDS  
A GREENER  
FUTURE!**

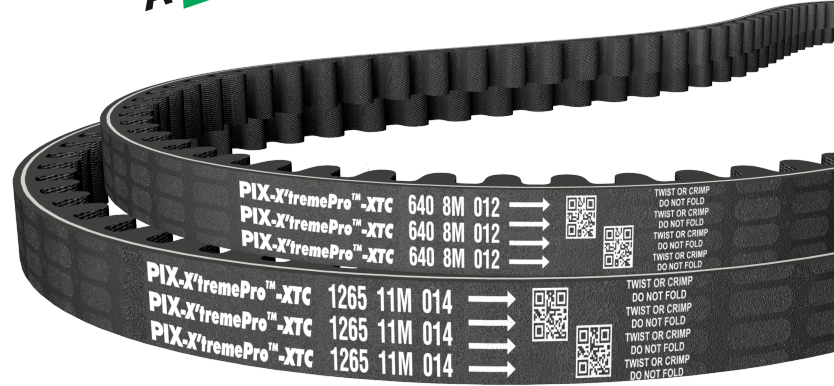

### Features

- Highly-engineered HSN compound enhances abrasion, chemical, and weather resistance.
- Superior power transmission capacity compared to standard Timing Belts.
- Carbon cords for maintenance-free operation and superior torsional response.
- Lower operational cost over chain/shaft drives.
- Specially-woven nylon fabric teeth to extend product life and ensure noise-free operation.
- Anti-static properties as per ISO 9563.
- Temperature range: -35°C to +150°C.

### Construction details

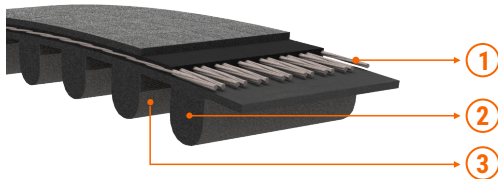

1. Carbon cords for enhanced dimensional stability offer excellent flex life and high tensile strength.
2. High-modulus-fibre-loaded HSN compound to withstand high power and high temperature.
3. Nylon fabric protects the teeth from wear and provides extended service life.

### Product range



Section	Pitch (p) (mm)	Tooth Height (h) (mm)	Thickness (Th) (mm)	Manufacturing range (mm)		Length Designation
				Min.	Max.	
XTP-8M	8	3.48	6.0	600	4400	Lp
XTP-11M	11	5.00	7.5	1265	1991	Lp





# PIX

Power Transmission Solutions

*Driving growth!*

## Product range

### 8M Section Belts

Section	No. of teeth	Length	
		mm	inches
XTP 600 8M	75	600	23.62
XTP 640 8M	80	640	25.20
XTP 720 8M	90	720	28.35
XTP 800 8M	100	800	31.50
XTP 896 8M	112	896	35.28
XTP 960 8M	120	960	37.80
XTP 1000 8M	125	1000	39.37
XTP 1040 8M	130	1040	40.94
XTP 1120 8M	140	1120	44.09
XTP 1200 8M	150	1200	47.24
XTP 1224 8M	153	1224	48.19
XTP 1280 8M	160	1280	50.39
XTP 1440 8M	180	1440	56.69
XTP 1600 8M	200	1600	62.99
XTP 1760 8M	220	1760	69.29
XTP 2000 8M	250	2000	78.74
XTP 2240 8M	280	2240	88.19
XTP 2600 8M	325	2600	102.36
XTP 2800 8M	350	2800	110.24
XTP 3048 8M	381	3048	120.00
XTP 3200 8M	400	3200	125.98
XTP 3280 8M	410	3280	129.13
XTP 3600 8M	450	3600	141.73
XTP 4400 8M	550	4400	173.23

• Intermediate sections can be made available upon request.

### 11M Section Belts

Section	No. of teeth	Length	
		mm	inches
XTP 1265 11M	115	1265	49.80
XTP 1826 11M	166	1826	71.89
XTP 1848 11M	168	1848	72.76
XTP 1870 11M	170	1870	73.62
XTP 1947 11M	177	1947	76.65
XTP 1991 11M	181	1991	78.39



## Applications

Electric scooters, Electric bikes, Electric bicycles.